


Terminal block enclosure

## ALR 1308-4<sup>2</sup>

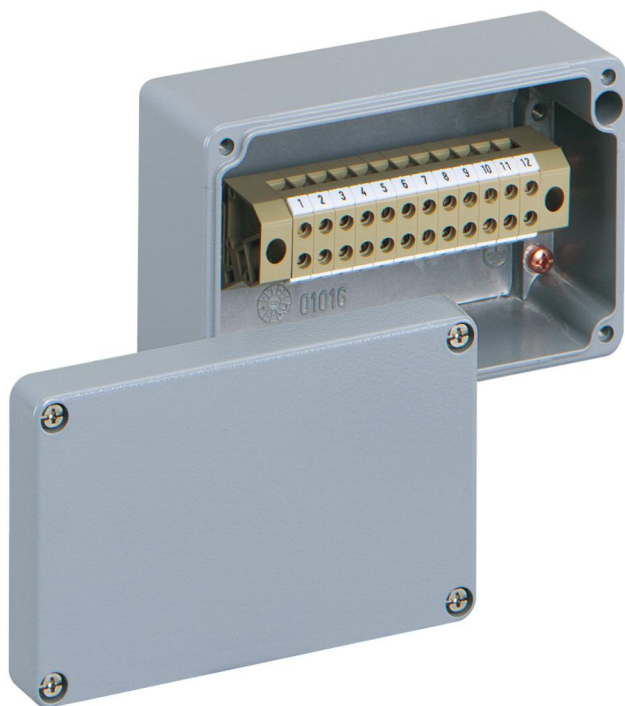

### ALR 1308-4<sup>2</sup>

Terminal block enclosure

CUSTOMIZABLE

Productnumber: 16040601

Dimensions: 125 x 80 x 57 mm

Terminal block enclosure, protection class IP66, nominal cross-section 4 mm<sup>2</sup>, Ui=400V AC, Aluminium, powder-coated painting, internal fixing points, for installations in industrial environments and protected outdoor areas

equipped with 12-pole terminal block 4mm<sup>2</sup>  
(Contaclip BKA 4 type)



## Technical Data

### electrical characteristics

Rated insulation voltage AC:	400 V
Max. conductor cross section:	4 mm <sup>2</sup>
Type of protection:	IP66
UL Type Rating:	not specified

### Dimensions

Width:	125 mm
Length:	80 mm
Height:	57 mm

### Material characteristics

UV-resistant:	yes
Halogen free:	yes
Industry quality:	yes

### mechanical properties

Type of fastening:	Wall/ceiling mounting
Impact strength:	IK09
Sealable:	yes
Fastening:	internal fixing points

### Ambient conditions

max. relative humidity 25°C:	95 %
max. relative humidity 40°C:	50 %
Min. ambient temperature:	-35 °C
Max. ambient temperature:	75 °C
24h ambient temperature:	60 °C
Installation location:	protected outdoor areas

## Material

Base unit material:	Aluminium, powder-coated painting
Cover material:	Aluminium, powder-coated painting
Sealing material:	Polyurethane

## Accessories

[15400401 - AL ALS-kl - External attachment set](#)