


Channel installation box

KD 2 70/50 K3 ws

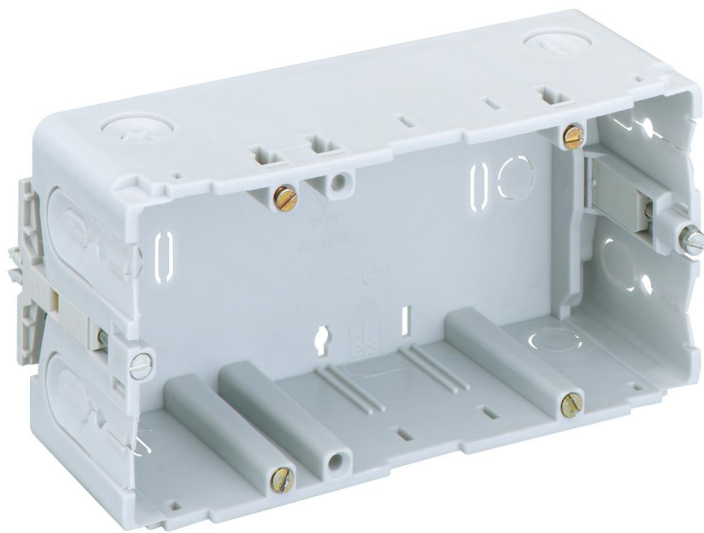

KD 2 70/50 K3 ws

Channel installation box

Productnumber: 38245001

Dimensions: 71 x 142 x 54 mm

Channel installation box, rated insulation voltage:
400V AC, certified by VDE (DIN EN 50085-1 (VDE
0604-1))

**2-way, for installation in Kleinhuis wall
trunking/device installation ducts**



Technical Data

electrical characteristics

| | |
|------------------------------|-------|
| Rated insulation voltage AC: | 400 V |
|------------------------------|-------|

Colours

| | |
|---------------|-------|
| Cover colour: | green |
|---------------|-------|

Dimensions

| | |
|--------|-------|
| Width: | 71 mm |
|--------|-------|

| | |
|---------|--------|
| Length: | 142 mm |
|---------|--------|

| | |
|---------|-------|
| Height: | 54 mm |
|---------|-------|

Material characteristics

| | |
|---------------|----|
| Halogen free: | no |
|---------------|----|

| | |
|-------------------|----|
| Industry quality: | no |
|-------------------|----|

Ambient conditions

| | |
|------------------------------|-------|
| max. relative humidity 25°C: | 100 % |
|------------------------------|-------|

| | |
|------------------------------|------|
| max. relative humidity 40°C: | 50 % |
|------------------------------|------|

| | |
|---------------------------|--------|
| Min. ambient temperature: | -25 °C |
|---------------------------|--------|

| | |
|---------------------------|-------|
| Max. ambient temperature: | 40 °C |
|---------------------------|-------|

| | |
|--------------------------|-------|
| 24h ambient temperature: | 35 °C |
|--------------------------|-------|

| | |
|------------------------|---------|
| Installation location: | Indoors |
|------------------------|---------|

Material

| | |
|---------------------|---------------|
| Base unit material: | Polypropylene |
|---------------------|---------------|

| | |
|-----------------|---------------|
| Cover material: | Polypropylene |
|-----------------|---------------|

Certificates

| | |
|------------|-----------------------------------|
| Test mark: | VDE (DIN EN 50085-1 (VDE 0604-1)) |
|------------|-----------------------------------|
