


Terminal block

## WK 100 KLS-10<sup>2</sup>

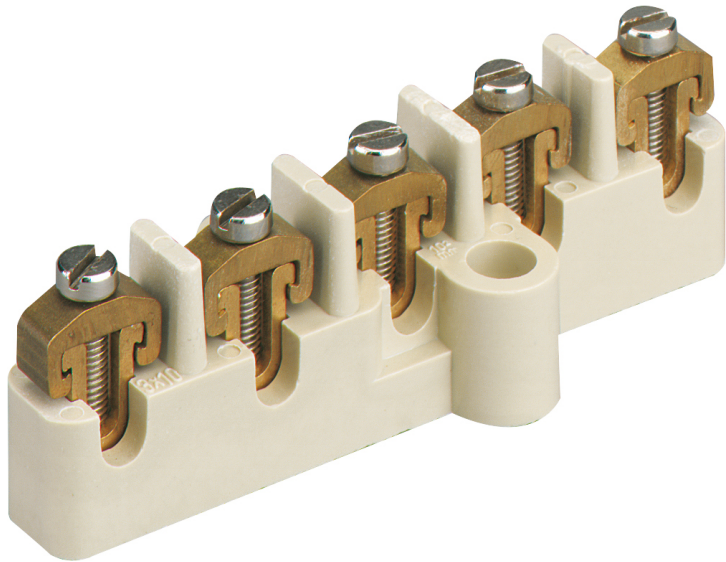

### WK 100 KLS-10<sup>2</sup>

**Terminal block**

Productnumber: 46051001

Dimensions: 33 x 96 x 26,5 mm

Connecting terminal,  $U_i=400V / 690V$

**5x10 mm<sup>2</sup>, for K15, K3-, K4-EK boxes**

## Technical Data

### electrical characteristics

Rated operating voltage AC:	690 V
Number of poles:	5
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	4 mm <sup>2</sup>
Connection 1: Connectable conductor cross-section, single-wire (max):	10 mm <sup>2</sup>

### Dimensions

Width:	33 mm
Length:	96 mm
Height:	26.5 mm

### Material characteristics

Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C
Industry quality:	no

### mechanical properties

Connection 1: Tightening moment:	2 Nm
----------------------------------	------

### Material

Insulating body material:	Duroplast
---------------------------	-----------