

Terminal block

## **WK 160 KLS-16<sup>2</sup>**

### **WK 160 KLS-16<sup>2</sup>**


**Terminal block**

Productnumber: 46051601

Dimensions: 38 x 120 x 32 mm

Connecting terminal,  $U_i=400V / 690V$

**5x16 mm<sup>2</sup>, for K3-, K4-EK boxes**

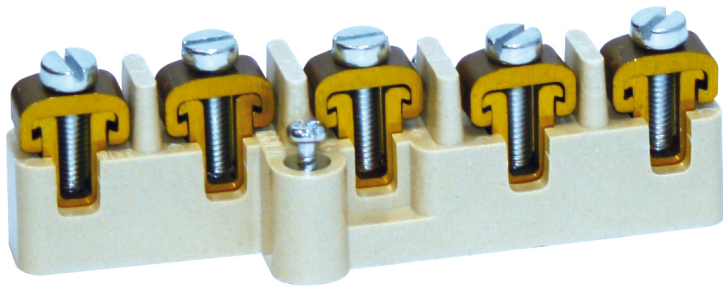

## Technical Data

### electrical characteristics

Rated operating voltage AC:	690 V
Number of poles:	5
shockproof:	No
Connection 1: Connection type:	Screws
Connection 1: Clamping points per pole:	1
Connection 1: Suitable for Cu conductors:	1
Connection 1: Connectable conductor cross-section, single-wire (min):	6 mm <sup>2</sup>
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm <sup>2</sup>

### Dimensions

Width:	38 mm
Length:	120 mm
Height:	32 mm

### Material characteristics

Flammability class according with UL94:	V0
Glow-wire flammability according to EN 60695-2-11:	960 °C
Industry quality:	no

### Material

Insulating body material:	Duroplast
---------------------------	-----------